

University of Groningen

PID control of second-order systems with hysteresis

Jayawardhana, Bayu; Logemann, Hartmut; Ryan, Eugene P.

Published in:
International Journal of Control

DOI:
[10.1080/00207170701772479](https://doi.org/10.1080/00207170701772479)

IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

Document Version
Publisher's PDF, also known as Version of record

Publication date:
2008

[Link to publication in University of Groningen/UMCG research database](#)

Citation for published version (APA):

Jayawardhana, B., Logemann, H., & Ryan, E. P. (2008). PID control of second-order systems with hysteresis. *International Journal of Control*, 81(8), 1331-1342. <https://doi.org/10.1080/00207170701772479>

Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

This article was downloaded by: [University of Groningen]

On: 22 July 2009

Access details: Access Details: [subscription number 912004903]

Publisher Taylor & Francis

Informa Ltd Registered in England and Wales Registered Number: 1072954 Registered office: Mortimer House, 37-41 Mortimer Street, London W1T 3JH, UK



International Journal of Control

Publication details, including instructions for authors and subscription information:

<http://www.informaworld.com/smpp/title-content=t713393989>

PID control of second-order systems with hysteresis

Bayu Jayawardhana ^a; Hartmut Logemann ^a; Eugene P. Ryan ^a

^a Department of Mathematical Sciences, University of Bath, UK

First Published: August 2008

To cite this Article Jayawardhana, Bayu, Logemann, Hartmut and Ryan, Eugene P. (2008) 'PID control of second-order systems with hysteresis', *International Journal of Control*, 81:8, 1331 — 1342

To link to this Article: DOI: 10.1080/00207170701772479

URL: <http://dx.doi.org/10.1080/00207170701772479>

PLEASE SCROLL DOWN FOR ARTICLE

Full terms and conditions of use: <http://www.informaworld.com/terms-and-conditions-of-access.pdf>

This article may be used for research, teaching and private study purposes. Any substantial or systematic reproduction, re-distribution, re-selling, loan or sub-licensing, systematic supply or distribution in any form to anyone is expressly forbidden.

The publisher does not give any warranty express or implied or make any representation that the contents will be complete or accurate or up to date. The accuracy of any instructions, formulae and drug doses should be independently verified with primary sources. The publisher shall not be liable for any loss, actions, claims, proceedings, demand or costs or damages whatsoever or howsoever caused arising directly or indirectly in connection with or arising out of the use of this material.

PID control of second-order systems with hysteresis

Bayu Jayawardhana, Hartmut Logemann* and Eugene P. Ryan

Department of Mathematical Sciences, University of Bath, Bath BA2 7AY, UK

(Received 10 May 2007; final version received 27 October 2007)

The efficacy of proportional, integral and derivative (PID) control for set point regulation and disturbance rejection is investigated in a context of second-order systems with hysteretic components. Two basic structures are studied: in the first, the hysteretic component resides (internally) in the restoring force action of the system ('hysteretic spring' effects); in the second, the hysteretic component resides (externally) in the input channel (e.g. piezo-electric actuators). In each case, robust conditions on the PID gains, explicitly formulated in terms of the system data, are determined under which asymptotic tracking of constant reference signals and rejection of constant disturbance signals is guaranteed.

Keywords: hysteresis; non-linear systems; PID control; tuning regulators

1. Introduction

With reference to Figures 1 and 2, we consider PID control of single-input (mechanical) systems of the following two forms:

$$m\ddot{x} + c\dot{x} + \Phi(x) = u + d, \quad (1)$$

$$m\ddot{x} + c\dot{x} + kx = \Phi(u + d_2) + d_1, \quad (2)$$

with input $t \mapsto u(t) \in \mathbb{R}$ and constant (but unknown)

disturbances $d, d_1, d_2 \in \mathbb{R}$. In a mechanical context, $x(t)$ represents displacement at time $t \in \mathbb{R}_+ := [0, \infty)$, m and c are the mass and the damping constant, and, in (2), k is a linear spring constant. In the case of (1), the operator Φ models a restoring force which may exhibit hysteresis phenomena, a particular example of which is the 'hysteric spring' model discussed in, for example, Symens et al. (2002), Al-Bender et al. (2004). In the case of (2), the operator Φ models hysteretic actuation. Such hysteretic effects arise in, for example, micro-positioning control problems using piezo-electric actuators or smart actuators, as investigated in, *inter alia*, Ge and Jouaneh (1996), Adriaens et al. (1997), Gorbet et al. (2001), Gorbet and Morris (2003), Iyer et al. (2005), Park et al. (2005), Song et al. (2005), Tan et al. (2005) and Lin and Yang (2006).

Motivated by a recent study in Ikhoulane and Rodellar (2006), for each of the above system

structures we will investigate the efficacy of a PID controller of the form

$$u(t) = -k_p(x(t) - r) - k_d\dot{x}(t) - k_i \int_0^t (x(\tau) - r)d\tau + u_0, \quad (3)$$

where u_0 is the initial condition on the integrator, $k_p, k_i, k_d \geq 0$ are the controller gains and r is a constant reference signal to be tracked. The latter is a distinguishing feature of the present paper *vis à vis* Ikhoulane and Rodellar (2006) (wherein constant non-zero reference signals cannot be handled). Moreover, the investigation in Ikhoulane and Rodellar (2006) is concerned with systems of form (1) and is focussed on one particular hysteresis component, namely the Bouc-Wen model (Wen 1976, Ikhoulane et al. 2007). By contrast, in this paper we deal with a large class of rate-independent causal hysteresis operators which includes the play operator, stop operator, backlash operator and Preisach operators. These operators are briefly discussed in §2; a more detailed discussion can be found in Brokate and Sprekels (1996), Logemann and Mawby (2001) and Mayergoyz (2003).

The rapidly expanding literature (of which the references at the end of this article are but a representative sample) on analysis and control of

*Corresponding author. Email: hl@maths.bath.ac.uk

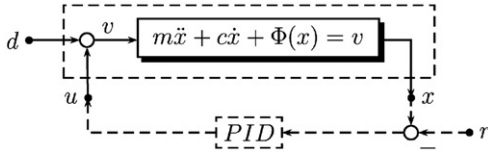


Figure 1. System of form (1).

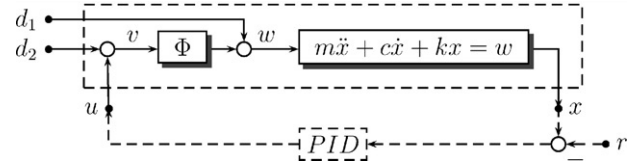


Figure 2. System of form (2).

systems with hysteresis attests to the growing importance of the field to both control theorists and practitioners. The analytical framework of the present paper is based on frequency-domain conditions developed recently in Logemann and Ryan (2003) and Logemann et al. (2007) which ensure existence, regularity and certain asymptotic properties of solutions of a feedback interconnection of a linear (possibly infinite dimensional) system and a hysteresis operator Φ . Within this framework, the main contribution of the paper is as follows. For each of the two underlying system structures (1) and (2), robust design criteria – formulated explicitly in terms of bounds on the plant parameters m, c, k and on a Lipschitz-type constant λ associated with the hysteresis operator Φ – are developed under which disturbance rejection is assured and the tracking error $x(t) - r$ converges, as $t \rightarrow \infty$, to zero at exponential rate. We emphasise the robustness aspect: the latter performance is achieved by PID control for which computation of the associated PID gains requires only the availability of bounds on the parameters m, c, k and λ ; in particular (and in contrast to Ikhouane and Rodellar (2006)), knowledge of the hysteresis operator Φ is not required (see, in particular, Remark 2 and Remark 3 below).

Notation We conclude this introduction with some remarks on terminology and notation. As usual, we denote the space of continuous functions $I \rightarrow \mathbb{R}$, $I \subset \mathbb{R}$ an interval, by $C(I)$. A function $f \in C(\mathbb{R}_+)$ is said to be piecewise monotone if, for some strictly increasing unbounded sequence $(t_i)_{i=0}^\infty$ in \mathbb{R}_+ with $t_0 = 0$, f is monotone on $[t_{i-1}, t_i]$ for all $i \in \mathbb{N}$; the space of all such piecewise monotone functions is denoted by $C_{\text{pm}}(\mathbb{R}_+)$. The (Banach) space of measurable functions $f: \mathbb{R}_+ \rightarrow \mathbb{R}$ such that $\|f\|_{L^p} := \int_0^\infty |f(t)|^p dt < \infty$, $1 \leq p < \infty$, is denoted by $L^p(\mathbb{R}_+)$. For $f \in L^p(\mathbb{R}_+)$ and $T > 0$, f_T denotes the concatenation of the functions $f|_{[0, T]}$ and 0, given by

$$f_T(t) := \begin{cases} f(t), & t \in [0, T] \\ 0, & t \in (T, \infty). \end{cases}$$

The space $L^p_{\text{loc}}(\mathbb{R}_+)$ consists of all measurable functions $f: \mathbb{R}_+ \rightarrow \mathbb{R}$ such that $f_T \in L^p(\mathbb{R}_+)$ for all $T > 0$. By

$W^{1,1}_{\text{loc}}(\mathbb{R}_+)$ we denote the space of locally absolutely continuous real-valued functions defined on \mathbb{R}_+ , that is, $f \in W^{1,1}_{\text{loc}}(\mathbb{R}_+)$ if and only if there exists $g \in L^1_{\text{loc}}(\mathbb{R}_+)$ such that $f(t) = f(0) + \int_0^t g(s) ds$ for all $t \in \mathbb{R}_+$.

Let $\alpha \in \mathbb{R}$. The α -exponentially weighted L^p -space of functions $\mathbb{R}_+ \rightarrow \mathbb{R}$ is defined as

$$L^p_\alpha(\mathbb{R}_+) := \{f: f(\cdot) \exp(-\alpha \cdot) \in L^p(\mathbb{R}_+)\}$$

which, endowed with the norm

$$\|f\|_{L^p_\alpha(\mathbb{R}_+)} = \|f(\cdot) \exp(-\alpha \cdot)\|_{L^p(\mathbb{R}_+)} = \left(\int_0^\infty |e^{-\alpha t} f(t)|^p dt \right)^{1/p},$$

is a Banach space.

A function $u \in C(\mathbb{R}_+)$ is ultimately non-decreasing (non-increasing) if there exists $\tau \in \mathbb{R}_+$ such that u is non-decreasing (non-increasing) on $[\tau, \infty)$; u is said to be approximately ultimately non-decreasing (non-increasing), if for all $\varepsilon > 0$, there exists an ultimately non-decreasing (non-increasing) function $v \in C(\mathbb{R}_+)$ such that

$$|u(t) - v(t)| \leq \varepsilon, \quad \forall t \in \mathbb{R}_+.$$

The unit step function is denoted by θ and \star denotes convolution. Finally, we set $\mathbb{R}^* := \mathbb{R} \setminus \{0\}$.

2. Hysteresis operators

An operator $\Psi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ is said to be causal if, for all $\tau \geq 0$ and all $v_1, v_2 \in C(\mathbb{R}_+)$, $v_1 = v_2$ on $[0, \tau]$ implies that $\Psi(v_1) = \Psi(v_2)$ on $[0, \tau]$. The following remark shows that causal operators can be extended to ‘localised’ versions of the domain space.

Remark 1: Let $I = [0, T]$, where $0 < T < \infty$, or $I = [0, T)$, where $0 < T \leq \infty$. For $\tau \in I$, define $Q_\tau: C(I) \rightarrow C(\mathbb{R}_+)$

$$(Q_\tau u)(t) = \begin{cases} u(t), & 0 \leq t \leq \tau, \\ u(\tau), & t > \tau. \end{cases} \quad (4)$$

If $\Psi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ is causal, then Ψ extends in a natural way to an operator $C(I) \rightarrow C(I)$: for $v \in C(I)$ simply set

$$(\Psi(v))(t) := (\Psi(Q_\tau v))(t), \quad 0 \leq t \leq \tau, \quad \tau \in I$$

Causality of Ψ guarantees that this definition does not depend on the choice of τ and so $\Psi(v)$ is a well-defined function in $C(I)$ for any $v \in C(I)$.

We will not distinguish notationally between the original causal operator and its localisation.

A function $f: \mathbb{R}_+ \rightarrow \mathbb{R}_+$ is a time transformation if f is continuous and non-decreasing with $f(0) = 0$ and $\lim_{t \rightarrow \infty} f(t) = \infty$. An operator $\Phi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ is rate independent if, for every time transformation f ,

$$(\Phi(u \circ f))(t) = (\Phi(u))(f(t)), \quad \forall u \in C(\mathbb{R}_+), \quad \forall t \in \mathbb{R}_+.$$

The operator $\Phi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ is said to be a hysteresis operator if Φ is causal and rate independent.

The numerical value set, NVS Φ , of a hysteresis operator Φ is defined by

$$\text{NVS } \Phi := \{(\Phi(u))(t) : u \in C(\mathbb{R}_+), t \in \mathbb{R}_+\}.$$

For $w \in C([0, \alpha])$ (with $\alpha \geq 0$) and $\gamma, \delta > 0$, we define

$$\mathcal{C}(w; \delta, \gamma) := \left\{ v \in C([0, \alpha + \gamma]) : \right. \\ \left. v|_{[0, \alpha]} = w, \max_{t \in [\alpha, \alpha + \gamma]} |v(t) - w(\alpha)| \leq \delta \right\}.$$

We will have occasion to impose some or all of the following conditions on the hysteresis operator $\Phi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$:

- (N1) If $u \in W_{\text{loc}}^{1,1}(\mathbb{R}_+)$, then $\Phi(u) \in W_{\text{loc}}^{1,1}(\mathbb{R}_+)$;
- (N2) The operator Φ is monotone in the sense that, if $u \in W_{\text{loc}}^{1,1}(\mathbb{R}_+)$, then

$$(\Phi(u))'(t)u'(t) \geq 0, \quad \text{a.e. } t \in \mathbb{R}_+;$$

- (N3) There exists $\lambda > 0$ such that for all $\alpha \geq 0$ and $w \in C([0, \alpha])$, there exist constants $\gamma, \delta > 0$ such that

$$\max_{\tau \in [\alpha, \alpha + \gamma]} |(\Phi(u))(\tau) - (\Phi(v))(\tau)| \leq \\ \lambda \max_{\tau \in [\alpha, \alpha + \gamma]} |u(\tau) - v(\tau)|, \quad \forall u, v \in \mathcal{C}(w; \delta, \gamma);$$

- (N4) For all $\alpha \in \mathbb{R}_+$ and all $u \in C([0, \alpha])$, there exist $c > 0$ such that

$$\max_{\tau \in [0, t]} |(\Phi(u))(\tau)| \leq c(1 + \max_{\tau \in [0, t]} |u(\tau)|), \\ \forall t \in [0, \alpha];$$

- (N5) If $u \in C(\mathbb{R}_+)$ is approximately ultimately non-decreasing and $\lim_{t \rightarrow \infty} u(t) = \infty$, then $(\Phi(u))(t)$ and $(\Phi(-u))(t)$ converge, as $t \rightarrow \infty$, to $\sup \text{NVS } \Phi$ and $\inf \text{NVS } \Phi$, respectively;
- (N6) If, for $u \in C(\mathbb{R}_+)$, $\lim_{t \rightarrow \infty} (\Phi(u))(t) \in \text{int NVS } \Phi$, then u is bounded.

These technical assumptions are invoked in Theorem 1 and 2 below (which underpin the results of the paper); moreover, they are natural in the sense that they hold for the most commonly encountered hysteresis operators: relay, elastic-plastic, backlash, Prandtl, Preisach.

We mention that, if a hysteresis operator Φ satisfies (N5), then NVS Φ is an interval. Furthermore, we remark that many hysteresis operators (see, for example, Brokate and Sprekels (1996) and Logemann and Mawby (2001)) are Lipschitz continuous in the sense that

$$\sup_{\tau \in \mathbb{R}_+} |(\Phi(u))(\tau) - (\Phi(v))(\tau)| \leq \lambda \sup_{\tau \in \mathbb{R}_+} |u(\tau) - v(\tau)|, \\ \forall u, v \in C(\mathbb{R}_+), \quad (5)$$

for some $\lambda > 0$, in which case (N3) and (N4) are (trivially) satisfied and, furthermore, (N1) holds (see Logemann and Mawby (2001)).

In the following, we briefly describe the backlash, elastic-plastic and Preisach operators which are widely adopted as hysteresis models in engineering applications.


Backlash operator. The backlash (or play) operator, widely used in mechanical models (of, for example, gear trains or of hydraulic servovalves), has been discussed rigorously in many references, see for example Brokate and Sprekels (1996), Logemann and Mawby (2001) and Mayergoyz (2003). With a view to giving a precise definition of backlash, we first define, for each $h \in \mathbb{R}_+$, the function $b_h: \mathbb{R}^2 \rightarrow \mathbb{R}$ by

$$b_h(v, w) := \max\{v - h, \min\{v + h, w\}\}.$$

For all $h \in \mathbb{R}_+$ and all $\xi \in \mathbb{R}$, we introduce an operator $\mathcal{B}_{h, \xi}$ defined on the space $C_{\text{pm}}(\mathbb{R}_+)$ of piecewise monotone functions, by defining, for every $u \in C_{\text{pm}}(\mathbb{R}_+)$,

$$(\mathcal{B}_{h, \xi}(u))(t) \\ = \begin{cases} b_h(u(0), \xi) & \text{for } t = 0 \\ b_h(u(t), (\mathcal{B}_{h, \xi}(u))(t_i)) & \text{for } t_{i-1} < t \leq t_i, i \in \mathbb{N} \end{cases} \quad (6)$$

where $0 = t_0 < t_1 < t_2 < \dots$ is a partition of \mathbb{R}_+ , such that u is monotone on each of the intervals $[t_{i-1}, t_i]$, $i \in \mathbb{N}$. Here ξ plays the role of an 'initial state'. It is well known, see, for example, Brokate and Sprekels (1996, page 42), that the operator $\mathcal{B}_{h, \xi}: C_{\text{pm}}(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ can be extended uniquely to a hysteresis operator $\mathcal{B}_{h, \xi}: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$; moreover, the extended operator is Lipschitz continuous (in the sense of (5)) with Lipschitz constant $\lambda = 1$ and satisfies (N1)–(N6) (see, for example, Logemann and Mawby (2001, Proposition 5.4)). It is clear that NVS $\mathcal{B}_{h, \xi} = \mathbb{R}$. The action of the backlash operator is illustrated in Figure 3.

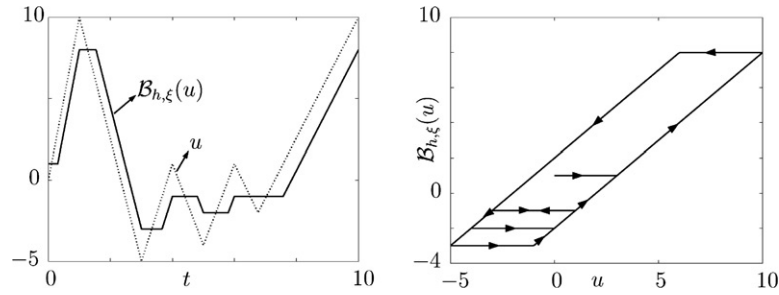Figure 3. Backlash operator $\mathcal{B}_{h,\xi}$, with $h=2$ and $\xi=1$.

Elastic-plastic operator. The elastic-plastic operator (also called the stop operator) describes the stress-strain relation in a one-dimensional elastic-plastic element. When the modulus of the stress is smaller than the yield stress, the strain is related to the stress through Hooke's law (linear). Once the stress exceeds the yield value, it remains constant under further increasing of the strain; however, the elastic behaviour is recovered when the strain is again decreased.

For each $h \in \mathbb{R}_+$, define the function $e_h: \mathbb{R} \rightarrow \mathbb{R}$ by

$$e_h(u) = \min\{h, \max\{-h, u\}\}.$$

For all $h \in \mathbb{R}_+$ and all $\xi \in \mathbb{R}$, we introduce an operator $\mathcal{E}_{h,\xi}$ on $C_{\text{pm}}(\mathbb{R}_+)$ by defining, for every $u \in C_{\text{pm}}(\mathbb{R}_+)$,

$$\begin{aligned} (\mathcal{E}_{h,\xi}(u))(t) &= \begin{cases} e_h(u(0) - \xi) & \text{for } t = 0 \\ e_h(u(t) - u(t_i) + (\mathcal{E}_{h,\xi}(u))(t_i)) & \text{for } t_{i-1} < t \leq t_i, i \in \mathbb{N}, \end{cases} \end{aligned} \quad (7)$$

where $0 = t_0 < t_1 < t_2 < \dots$ is a partition of \mathbb{R}_+ such that u is monotone on each of the intervals $[t_i, t_{i+1}]$, $i \in \mathbb{N}$. Again, ξ plays the role of an 'initial state'. It is well known (see, for example, Brokate and Sprekels (1996, page 44)), that the operator $\mathcal{E}_{h,\xi}: C_{\text{pm}}(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ can be extended uniquely to a hysteresis operator $\mathcal{E}_{h,\xi}: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$; moreover, the extended operator satisfies (N1)–(N6) with $\lambda = 2$; see, for example, Logemann and Mawby (2001, Proposition 5.7). It is clear that $\text{NVS } \mathcal{E}_{h,\xi} = [-h, h]$. The action of the elastic-plastic operator is illustrated in Figure 4. Finally, we mention that $\mathcal{E}_{h,\xi}(u) + \mathcal{B}_{h,\xi}(u) = u$ for all $u \in C(\mathbb{R}_+)$.

Prandtl and Preisach operators. The Preisach operator, a version of which is described below, encompasses both backlash, elastic-plastic and, more generally, Prandtl operators. It represents a far more general type of hysteresis which, for certain input functions, exhibits nested loops in the corresponding input-output characteristics. Let $\zeta: \mathbb{R}_+ \rightarrow \mathbb{R}$ be a compactly supported and globally Lipschitz function with

Lipschitz constant 1. Furthermore, let μ be a signed Borel measure on \mathbb{R}_+ such that $|\mu|(K) < \infty$ for all compact sets $K \subset \mathbb{R}_+$, where $|\mu|$ denotes the total variation of μ . Denoting the Lebesgue measure on \mathbb{R} by μ_L , let $w: \mathbb{R} \times \mathbb{R}_+ \rightarrow \mathbb{R}$ be a locally $(\mu_L \otimes \mu)$ -integrable function and let $w_0 \in \mathbb{R}$. The operator $\mathcal{P}_\zeta: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ defined by

$$(\mathcal{P}_\zeta(u))(t) = \int_0^\infty \int_0^{(\mathcal{B}_{\zeta, \zeta(t)}(u))(t)} w(s, h) \mu_L(ds) \mu(dh) + w_0, \quad \forall u \in C(\mathbb{R}_+), \quad \forall t \in \mathbb{R}_+, \quad (8)$$

is called a Preisach operator, cf. Brokate and Sprekels (1996, p. 55). It is clear that \mathcal{P}_ζ is a hysteresis operator. Under the assumption that the measure μ is finite and w is essentially bounded, the operator \mathcal{P}_ζ is Lipschitz continuous with Lipschitz constant $|\mu|(\mathbb{R}_+) \|w\|_\infty$, see Logemann and Mawby (2001). Furthermore, if we additionally assume that μ and w are non-negative valued, then, as shown in Logemann and Mawby (2001), (N1)–(N6) hold (with $\lambda = \mu(\mathbb{R}_+) \|w\|_\infty$ in (N3)) and

$$\sup \text{NVS } \mathcal{P}_\zeta = \int_0^\infty \int_0^\infty w(s, h) \mu_L(ds) \mu(dh) + w_0 \in [w_0, \infty], \quad (9)$$


$$\begin{aligned} \inf \text{NVS } \mathcal{P}_\zeta &= - \int_0^\infty \int_{-\infty}^0 w(s, h) \mu_L(ds) \mu(dh) \\ &\quad + w_0 \in [-\infty, w_0]. \end{aligned} \quad (10)$$

The special case, wherein $w \equiv 1$ and $w_0 = 0$ in (8), yields the Prandtl operator

$$(\mathcal{P}_\zeta(u))(t) = \int_0^\infty (\mathcal{B}_{\zeta, \zeta(t)}(u))(t) \mu(dh), \quad \forall u \in C(\mathbb{R}_+), \quad \forall t \in \mathbb{R}_+. \quad (11)$$

It follows from (9) and (10) that the numerical value set of the Prandtl operator defined in (11) is equal to \mathbb{R} (provided that $\mu \neq 0$).

To provide a concrete example of a Preisach operator, we adopt a product of continuous Gaussian distributions as the weighting function w (similar weighting function has been used by Mitchler

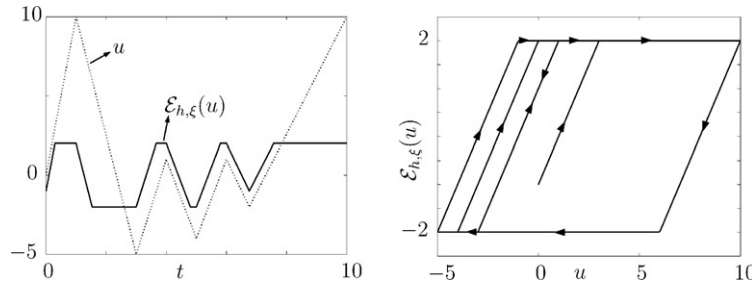Figure 4. Elastic-plastic operator $E_{h,\xi}$, with $h=2$ and $\xi=1$.

et al. 1997 in a Preisach model of magnetic remanence in materials), that is,

$$w : (s, h) \mapsto \frac{1}{2\pi} \exp(-(s^2 + h^2)/2).$$

Then

$$\begin{aligned} & \int_0^\infty \int_0^{(\mathcal{B}_{h,\zeta(h)}(u))(t)} \exp(-(s^2 + h^2)/2) ds dh \\ &= \int_0^\infty \int_0^{(\mathcal{B}_{h,\zeta(h)}(u))(t)} \exp(-s^2/2) \alpha(h) ds dh \\ &= \int_0^\infty \int_0^{(\mathcal{B}_{h,\zeta(h)}(u))(t)} \exp(-s^2/2) \mu_L(ds) \mu(dh), \end{aligned}$$

where $\alpha : \mathbb{R}_+ \rightarrow \mathbb{R}_+$ is given by $\alpha(h) = \exp(-h^2/2)$ and the measure μ is given by $\mu(dh) = \alpha(h)dh$. In particular, $\mu(\mathbb{R}_+) = \sqrt{\pi}/2$ and the Preisach operator given by

$$\begin{aligned} (\mathcal{P}_\zeta(u))(t) &= \frac{1}{2\pi} \int_0^\infty \int_0^{(\mathcal{B}_{h,\zeta(h)}(u))(t)} \exp(-(s^2 + h^2)/2) ds dh + w_0 \end{aligned} \quad (12)$$

is such that (N1)–(N6) hold, with

$$\lambda = \frac{1}{2\pi} \mu(\mathbb{R}_+) \sup_{\sigma \in \mathbb{R}_+} \exp(-\sigma) = \frac{1}{2\pi} \mu(\mathbb{R}_+) = \frac{1}{2\sqrt{2\pi}}$$

in (N3). In the case $\zeta=0$ and $w_0=0$, this operator is illustrated in Figure 5.

3. Asymptotic behaviour of feedback systems with hysteresis

In order to provide an appropriate analytical framework for the main investigation in §4, here we assemble some results from Logemann and Ryan (2003) and Logemann et al. (2007). The first result pertains to a feedback interconnection of a convolution operator G (with kernel g) and a hysteretic non-linearity Φ , as shown in Figure 6 below, and is

contained in Logemann and Ryan (2003) Theorem 4.1.

Theorem 1: Let $g \in L_\alpha^2(\mathbb{R}_+)$, for some $\alpha < 0$, be a function of locally bounded variation. Let $r_1, r_2 \in W_{\text{loc}}^{1,1}(\mathbb{R}_+)$ with $r'_1, r'_2 \in L_\alpha^2(\mathbb{R}_+)$. Let $\Phi : C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ be a hysteresis operator satisfying (N1), (N2) and (N3) with associated constant $\lambda > 0$. Assume that

$$\inf_{\omega \in \mathbb{R}} \operatorname{Re} \mathbf{G}(i\omega) > -\frac{1}{\lambda}, \quad (13)$$

where \mathbf{G} denotes the Laplace transform of g .

Then the feedback system

$$y = g \star r_1 + r_2 - g \star \Phi(y), \quad (14)$$

has a unique solution $y \in W_{\text{loc}}^{1,1}(\mathbb{R}_+)$ and there exist constants $\beta \in (\alpha, 0)$ and $\gamma > 0$ (depending only on g and λ) such that

$$\begin{aligned} & \|y\|_{L^\infty(\mathbb{R}_+)} + \|\Phi(y)\|_{L^\infty(\mathbb{R}_+)} + \|y'\|_{L_\beta^2(\mathbb{R}_+)} \\ &+ \|(\Phi(y))'\|_{L_\beta^2(\mathbb{R}_+)} \leq \gamma \left[\|r'_1\|_{L_\beta^2(\mathbb{R}_+)} + \|r'_2\|_{L_\beta^2(\mathbb{R}_+)} \right. \\ &\left. + |r_1(0)| + |r_2(0)| + |(\Phi(r_2))(0)| \right] \end{aligned} \quad (15)$$

and $y(t)$ and $(\Phi(y))(t)$ converge to finite limits as $t \rightarrow \infty$, the convergence being exponential with rate β .

In Theorem 1, it is assumed that the linear component of the system is described by a convolution operator with kernel (impulse response) g in $L_\alpha^2(\mathbb{R}_+)$ for some $\alpha < 0$. This implies that the linear subsystem is input–output stable and, in particular, does not contain any integrators.

The next result, Theorem 2, applies to a class of linear systems – containing an integrator with associated gain parameter $\kappa > 0$ – of the form shown in Figure 7, where again G is a convolution operator (with kernel g), $\Phi : C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ is a hysteresis operator, $r_1, r_2 \in \mathbb{R}$ and $q \in L^2(\mathbb{R}_+)$.

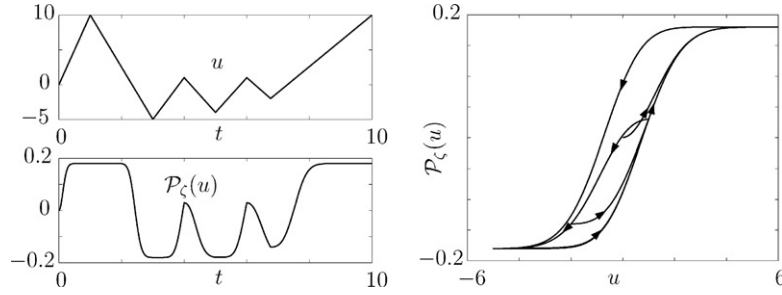

Figure 5. The Preisach operator (12) with $\zeta=0$ and $w_0=0$.

Figure 6. Feedback system with hysteretic non-linearity.




Figure 7. Feedback system with integrator and hysteretic non-linearity.

Theorem 2: Let $g \in L^1_\alpha(\mathbb{R}_+) + \mathbb{R}\delta_0$ for some $\alpha < 0$, where δ_0 is unit point mass at $t=0$ (the Dirac distribution with support at $t=0$). Let $r_1, r_2 \in \mathbb{R}$, $\kappa > 0$ and $q \in L^2(\mathbb{R}_+)$ with $\lim_{t \rightarrow \infty} q(t) = 0$. Let $\Phi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ be a hysteresis operator satisfying (N1)–(N6) with associated $\lambda > 0$. Let \mathbf{G} denote the Laplace transform of g and assume that $\mathbf{G}(0) > 0$, $r_1 + r_2/\mathbf{G}(0) \in \text{NVS } \Phi$ and

$$0 < \kappa < \begin{cases} 1/(\lambda|f(\mathbf{G})|), & f(\mathbf{G}) \neq 0 \\ \infty, & f(\mathbf{G}) = 0, \end{cases} \quad (16)$$

where $f(\mathbf{G}) := \inf_{\omega \in \mathbb{R}^*} \text{Re} \left(\frac{\mathbf{G}(i\omega)}{i\omega} \right)$.

Then, for each $y_0 \in \mathbb{R}$, the initial-value problem (describing the feedback system shown in Figure 7)

$$\dot{y} = \kappa(r_1 g \star \theta + q + r_2 \theta - g \star \Phi(y)), \quad y(0) = y_0 \in \mathbb{R}, \quad (17)$$

has a unique solution $y \in W^{1,1}_{\text{loc}}(\mathbb{R}_+)$ and y has the following properties: $\lim_{t \rightarrow \infty} \dot{y}(t) = 0$, $\lim_{t \rightarrow \infty} (\Phi(y))(t) = r_1 + r_2/\mathbf{G}(0)$ and $(\Phi(y))' \in L^2(\mathbb{R}_+)$. Furthermore, if $r_1 + r_2/\mathbf{G}(0)$ is an interior point of $\text{NVS } \Phi$, then y is bounded.

Proof: Since $g \in L^1_\alpha(\mathbb{R}_+) + \mathbb{R}\delta_0$, with $\alpha < 0$, it follows that

$$\limsup_{s \rightarrow 0, \text{Res } s > 0} \left| \frac{\mathbf{G}(s) - \mathbf{G}(0)}{s} \right| = |\mathbf{G}'(0)| < \infty.$$

Hence, \mathbf{G} satisfies the condition (L) in (Logemann et al., 2007, Theorem 4.1). Note that $g \star \theta - \mathbf{G}(0)\theta \in L^2(\mathbb{R}_+)$ and $(g \star \theta)(t) - \mathbf{G}(0) \rightarrow 0$ as $t \rightarrow \infty$. Furthermore, observe that system (17) has the same form as the system in Logemann et al. (2007, Equation (4.1)), with $h=0$, $\vartheta=0$ and $\psi=\text{id}$ in the latter and with the roles of ρ and g in the latter being played, respectively, by $\mathbf{G}(0)r_1 + r_2$ and $r_1(\mathbf{G}(0) - g \star \theta) - q \in L^2(\mathbb{R}_+)$ in the present context. Therefore, Theorem 4.1 in Logemann et al. (2007) may be applied to establish that (17) has a unique solution $y \in W^{1,1}_{\text{loc}}(\mathbb{R}_+)$, and $\lim_{t \rightarrow \infty} \dot{y}(t) = 0$, $(\Phi(y))' \in L^2(\mathbb{R}_+)$ and $\lim_{t \rightarrow \infty} (\Phi(y))(t) =: \Phi^\infty$ exists. Moreover, Theorem 4.1 in Logemann et al. (2007) also shows that y is bounded, provided that $r_1 + r_2/\mathbf{G}(0)$ is an interior point of $\text{NVS } \Phi$. It remains to show that $\Phi^\infty = r_1 + r_2/\mathbf{G}(0)$. This follows easily from (17) and the facts that $\dot{y}(t) \rightarrow 0$, $(g \star \theta)(t) \rightarrow \mathbf{G}(0)$ and $(g \star \Phi(y))(t) \rightarrow \mathbf{G}(0)\Phi^\infty$ as $t \rightarrow \infty$. \square

4. PID control of systems with hysteresis

We now focus attention on the application of Theorem 1 and 2 in the analysis and design of PID control in the context of each of system structures (1) and (2).

4.1 Systems of form (1)

Consider again a second-order system described by (1):

$$m\ddot{x} + c\dot{x} + \Phi(x) = u + d\theta, \quad x(0) = x_0, \quad \dot{x}(0) = v_0, \quad m > 0, c > 0, d \in \mathbb{R}, \quad (18)$$

where $d\theta$ is a constant disturbance signal. Assume that $r \in \mathbb{R}$ is a constant reference signal, in which case, the control objective is to determine, by feedback, the control input u to achieve the tracking objective: $x(t) \rightarrow r$ as $t \rightarrow \infty$. We will investigate the efficacy

of the following PID control in achieving this objective:

$$u(t) = -k_p(x(t) - r) - k_d\dot{x}(t) - k_i \int_0^t (x(\tau) - r) d\tau + u_0, \quad (19)$$

where $u_0 \in \mathbb{R}$ is the initial condition of the integrator and $k_p, k_d, k_i \geq 0$ are suitably chosen gains. Let $0 < \omega \leq \infty$. A function $x \in C^2([0, \omega))$ satisfying (18) and (19) is said to be a solution on $[0, \omega)$ of the closed-loop system given by (18) and (19).

Theorem 3: Let $\Phi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ be a hysteresis operator satisfying (N1), (N2) and (N3) (with associated constant $\lambda > 0$). Let $r, d \in \mathbb{R}$. If k_p, k_d, k_i are chosen such that

$$(A1) \quad k_d > -c + \sqrt{(2k_p + \lambda)m},$$

$$(A2) \quad 0 < k_i < k_p(k_p + \lambda)/(2(c + k_d)),$$

then, for each $(x_0, v_0, u_0) \in \mathbb{R}^3$, the initial-value problem given by (18) and (19) has a unique solution $x \in C^2(\mathbb{R}_+)$, $x(t) \rightarrow r$, $\dot{x}(t) \rightarrow 0$ and $\ddot{x}(t) \rightarrow 0$ as $t \rightarrow \infty$; moreover, $(\Phi(x))(t)$ converges to a finite limit as $t \rightarrow \infty$ (all convergences being exponentially fast).

Proof: By standard arguments (as in, for example, Logemann and Ryan (2003)), there exists a unique solution $x \in C^2(\mathbb{R}_+)$ of the initial-value problem given by (18) and (19). Setting

$$z(t) := \int_0^t (x(\tau) - r) d\tau - \frac{1}{k_i}(u_0 + d), \quad \forall t \in \mathbb{R}_+$$

and $p(s) := ms^3 + (c + k_d)s^2 + k_p s + k_i$, it follows that

$$p\left(\frac{d}{dt}\right)z = -\Phi(\dot{z} + r\theta). \quad (20)$$

Let $h \in C^3(\mathbb{R}_+)$ and $\rho \in C^3(\mathbb{R}_+)$ be the unique solutions of the following two initial-value problems:

$$p\left(\frac{d}{dt}\right)h = 0, \quad h(0) = 0, \quad \dot{h}(0) = 0, \quad \ddot{h}(0) = \frac{1}{m}$$

and

$$p\left(\frac{d}{dt}\right)\rho = 0, \quad \rho(0) = z(0) = -\frac{u_0 + d}{k_i},$$

$$\dot{\rho}(0) = \dot{z}(0) = x(0) - r, \quad \ddot{\rho}(0) = \ddot{z}(0) = \dot{x}(0),$$

respectively. Using the variation-of-parameters formula for higher order systems, we can rewrite (20) in the form

$$z = -h \star \Phi(\dot{z} + r\theta) + \rho. \quad (21)$$

Clearly $x = \dot{z} + r\theta$. Differentiating (21), writing $g := \dot{h}$ and using the fact that $h(0) = 0$, yields

$$x = \dot{\rho} + r\theta - g \star \Phi(x), \quad (22)$$

which has the structure of (14) (with $r_1 = 0$ and $r_2 = \dot{\rho} + r\theta$) to which Theorem 1 potentially applies. First, however, we need to show that the hypotheses of Theorem 1 hold in the context of (22). Clearly, $\dot{\rho} + r\theta \in W_{loc}^{1,1}(\mathbb{R}_+)$, so it remains to show that

$$(a) \quad g, \dot{\rho} \in L_\alpha^2 \text{ for some } \alpha < 0, \quad (b) \quad \inf_{\omega \in \mathbb{R}} \operatorname{Re} \mathbf{G}(i\omega) > -1/\lambda,$$

where, \mathbf{G} is the Laplace transform of g , that is,

$$\mathbf{G}(s) = \frac{s}{ms^3 + (c + k_d)s^2 + k_p s + k_i} = \frac{s}{p(s)}.$$

To conclude (a), it suffices to show that p is Hurwitz, in which case $h, \dot{h} = g, \dot{\rho}, \dot{\rho}$ and $\ddot{\rho}$ are exponential decaying functions. By the Routh-Hurwitz criterion, p is Hurwitz if, and only if,

$$c + k_d > 0 \quad \text{and} \quad 0 < k_i < k_p(c + k_d)/m. \quad (23)$$

Clearly (A1) implies the first of inequalities (23) and, moreover, implies that $(2k_p + \lambda)/(c + k_d) < (c + k_d)/m$ which, together with (A2), gives the second of inequalities (23):

$$0 < k_i < \frac{k_p(k_p + \lambda)}{2(c + k_d)} < \frac{k_p(2k_p + \lambda)}{c + k_d} < \frac{k_p(c + k_d)}{m}.$$

It remains to show that (b) holds. First observe that

$$\begin{aligned} \inf_{\omega \in \mathbb{R}} \operatorname{Re} \left(\frac{i\omega}{m(i\omega)^3 + (c + k_d)(i\omega)^2 + k_p(i\omega) + k_i} \right) &> -\frac{1}{\lambda} \\ \Leftrightarrow \inf_{\omega \in \mathbb{R}} \frac{k_p\omega^2 - m\omega^4}{(k_p\omega - m\omega^3)^2 + (k_i - (c + k_d)\omega^2)^2} &> -\frac{1}{\lambda} \\ \Leftrightarrow (k_p\omega - m\omega^3)^2 + \lambda(k_p\omega^2 - m\omega^4) + (k_i & \\ - (c + k_d)\omega^2)^2 > 0 \quad \forall \omega \in \mathbb{R} & \\ \Leftrightarrow m^2\omega^6 + \beta\omega^4 + (k_p^2 + \lambda k_p - 2k_i(c + k_d))\omega^2 & \\ + k_i^2 > 0 \quad \forall \omega \in \mathbb{R} & \\ \Leftrightarrow m^2\xi^3 + \beta\xi^2 + (k_p^2 + \lambda k_p - 2k_i(c + k_d))\xi & \\ + k_i^2 > 0 \quad \forall \xi \in \mathbb{R}_+, & \end{aligned} \quad (24)$$

where $\beta := (c + k_d)^2 - (2k_p + \lambda)m$. Now observe that the inequality (24) holds since, by (A1) and (A2), the polynomial in ξ on the LHS of (24) has positive coefficients, whence hypothesis (b) is satisfied. All hypotheses of Theorem 1 are now in place (in the context of system (22)), and so we may conclude that $x(t)$ and $(\Phi(x))(t)$ converge to finite limits as $t \rightarrow \infty$, the convergence being exponentially fast. Since h, ρ are

exponentially decaying functions and since $(\Phi(x))(t) = (\Phi(z + r\theta))(t)$ converges exponentially, as $t \rightarrow \infty$, to a finite limit, we conclude from (21) that $z(t)$ also converges, as $t \rightarrow \infty$, to a finite limit at exponential rate. Consequently, since both $z(t) = \int_0^t (x(\tau) - r) d\tau - (u_0 + d)/k_i$ and $x(t) - r$ have finite limits as $t \rightarrow \infty$, and converge exponentially, we conclude that $x(t) - r \rightarrow 0$ exponentially as $t \rightarrow \infty$. A routine argument involving the differentiation of (22) now shows that $\dot{x}(t) \rightarrow 0$ exponentially as $t \rightarrow \infty$. Consequently, the control signal $u(t)$ given by (19) converges exponentially fast to a finite limit as $t \rightarrow \infty$. Finally, invoking (18), we obtain that, $\ddot{x}(t)$ converges exponentially fast to a finite limit as $t \rightarrow \infty$. Boundedness of \dot{x} shows that this limit is equal to 0. \square

Remark 2: Assume that the parameters m , c and λ are unknown, but belong to known intervals, viz. $m \in (0, m_+]$, $c \in [c_-, c_+]$ and $\lambda \in (0, \lambda_+]$, where $m_+ > 0$, $0 < c_- \leq c_+$ and $\lambda_+ > 0$ are known constants. If the PID controller gains are determined by using the following procedure:

(P1) let $k_p > 0$ be arbitrary,

(P2) choose k_d such that $k_d > -c_- + \sqrt{(2k_p + \lambda_+)m_+}$,

(P3) choose k_i such that $0 < k_i < k_p^2/(2(c_+ + k_d))$,

then (A1) and (A2) hold and Theorem 3 applies to conclude that the PID controller, with the above choice of gain, solves the tracking and disturbance rejection problem.

4.2 Systems of form (2)

In this subsection we consider second-order systems described by (2):

$$\left. \begin{aligned} m\ddot{x} + c\dot{x} + kx &= d_1\theta + \Phi(u + d_2\theta), \\ x(0) &= x_0, \\ \dot{x}(0) &= v_0, \quad m > 0, \quad c > 0, \quad k > 0, \quad d_1, d_2 \in \mathbb{R} \end{aligned} \right\} \quad (25)$$

where $d_1\theta$ and $d_2\theta$ are constant disturbance signals. We will investigate the efficacy of the control structure (19) in both the absence ($k_d = 0$) and presence ($k_d > 0$) of derivative feedback.

Theorem 4: Let $\Phi: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ be a hysteresis operator satisfying (N1)–(N6) with associated $\lambda > 0$. Let $r, d_1, d_2 \in \mathbb{R}$ and assume that $rk - d_1 \in \overline{\text{NVS}} \Phi$.

Case (a) Set $k_d = 0$ and let $k_p, k_i > 0$ be chosen such that

$$(A) \quad 0 < k_i < \frac{k_p k}{c} < \frac{ck}{\lambda m}.$$

Case (b) Let $k_p, k_i, k_d > 0$ be chosen such that

$$(B1) \quad 0 < k_i < \infty,$$

$$(B2) \quad k_p > \frac{ck_i}{k},$$

$$(B3) \quad k_d > \frac{mk_p}{c}.$$

Then there exists a unique solution $x \in C^2(\mathbb{R}_+)$ of the closed-loop system given by (19) and (25), and

$$\lim_{t \rightarrow \infty} x(t) = r, \quad \lim_{t \rightarrow \infty} \dot{x}(t) = 0, \quad \lim_{t \rightarrow \infty} \ddot{x}(t) = 0, \\ \lim_{t \rightarrow \infty} (\Phi(u + d_2\theta))(t) = rk - d_1.$$

Moreover, if $rk - d_1$ is an interior point of $\text{NVS}\Phi$, then the control signal u given by (19) is bounded.

Proof: By standard arguments (as in, for example, Logemann and Ryan (2003)), there exists a unique solution $x \in C^2(\mathbb{R}_+)$ of the closed-loop system given by (19) and (25). Set $p(s) := ms^2 + cs + k$, let h be the solution of the initial-value problem

$$p\left(\frac{d}{dt}\right)h = 0, \quad h(0) = 0, \quad \dot{h}(0) = \frac{1}{m},$$

and let ρ be the solution of the initial-value problem

$$p\left(\frac{d}{dt}\right)\rho = 0, \quad \rho(0) = x_0, \quad \dot{\rho}(0) = v_0.$$

Then the solution x of the closed-loop system given by (19) and (25) satisfies

$$x = h * \left[\Phi\left(-k_p(x - r\theta) - k_d\dot{x} - k_i \int_0^t (x(\tau) - r) d\tau + (u_0 + d_2)\theta\right) + d_1\theta \right] + \rho. \quad (26)$$

Define $w \in C^1(\mathbb{R}_+)$ by

$$w(t) := u(t) + d_2 \\ = -k_p(x(t) - r) - k_d\dot{x}(t) \\ - k_i \int_0^t (x(\tau) - r) d\tau + u_0 + d_2, \quad \forall t \geq 0,$$

which, together with (26) and the facts that $h(0) = 0$ and $\dot{h}(0) = 1/m$, implies

$$\dot{w} = -k_p\dot{x} - k_d\ddot{x} - k_i(x - r\theta) \quad (27)$$

$$= k_i(r\theta + q - d_1g \star \theta - g \star \Phi(w)), \quad (28)$$

$$= -k_p(x_0 - r) - k_dv_0 + u_0 + d_2,$$

where

$$g := \frac{k_d}{k_i} \left[\ddot{h} + \frac{1}{m} \delta_0 \right] + \frac{k_p}{k_i} \dot{h} + h,$$

δ_0 being the unit point mass at 0 (the Dirac distribution with support at $t = 0$), and

$$q := -\frac{k_d}{k_i} \ddot{\rho} - \frac{k_p}{k_i} \dot{\rho} - \rho.$$

Noting that (28) has the structure of (17) (with the roles of y , κ , r_1 and r_2 being played by w , k_i , $-d_1$ and r , respectively), we seek to apply Theorem 2 by showing

that all hypotheses therein hold in the present context. Since $m, c, k, k_i, k_p > 0$ and $k_d \geq 0$, it follows that h, \dot{h}, \ddot{h} and q are exponentially decaying functions. Therefore, $g \in L^1_\alpha(\mathbb{R}_+) + \mathbb{R}\delta_0$, for some $\alpha < 0$. Moreover, the Laplace transform of g is given by

$$\mathbf{G}(s) = \frac{1}{k_i} \frac{k_d s^2 + k_p s + k_i}{ms^2 + cs + k}.$$

Since $k > 0$, we have $\mathbf{G}(0) = 1/k > 0$. By assumption, $rk - d_1 \in \overline{\text{NVS}} \Phi$, and we see that the hypothesis of Theorem 2 involving $\overline{\text{NVS}} \Phi$ is satisfied.

It remains to show that hypothesis (16) of Theorem 2 holds (with κ replaced by k_i). To this end, observe that

$$\begin{aligned} f(\mathbf{G}) &= \inf_{\omega \in \mathbb{R}^*} \operatorname{Re} \left(\frac{\mathbf{G}(i\omega)}{i\omega} \right) \\ &= \inf_{\omega \in \mathbb{R}^*} \operatorname{Re} \left(\frac{k_d(i\omega)^2 + k_p i\omega + k_i}{k_i(m(i\omega)^3 + c(i\omega)^2 + k i\omega)} \right) \\ &= \inf_{\omega \in \mathbb{R}} \left(\frac{(kk_p - ck_i) + \omega^2(ck_d - mk_p)}{k_i(m^2\omega^4 + (c^2 - 2mk)\omega^2 + k^2)} \right) \\ &= \inf_{\xi \in \mathbb{R}_+} \left(\frac{(kk_p - ck_i) + \xi(ck_d - mk_p)}{k_i((m\xi - k)^2 + c^2\xi)} \right). \end{aligned} \quad (29)$$

Define $\zeta: \mathbb{R}_+ \rightarrow \mathbb{R}$ by

$$\zeta(\xi) = \frac{(kk_p - ck_i) + \xi(ck_d - mk_p)}{k_i((m\xi - k)^2 + c^2\xi)}. \quad (30)$$

We consider Case (a) and Case (b) separately.

Case (a). Let $k_d = 0$ and let (A) hold. Then we have $kk_p - ck_i > 0$ and so

$$\begin{aligned} 0 > f(\mathbf{G}) &= \inf_{\xi \in \mathbb{R}_+} \zeta(\xi) \geq \inf_{\xi \in \mathbb{R}_+} \hat{\zeta}(\xi), \\ \text{where } \hat{\zeta}(\xi) &:= \frac{-mk_p\xi}{k_i((m\xi - k)^2 + c^2\xi)}. \end{aligned}$$

It is readily verified that $\hat{\zeta}$ attains a global minimum over \mathbb{R}_+ at $\xi = k/m$. Therefore,

$$0 > f(\mathbf{G}) \geq \hat{\zeta}(k/m) = -\frac{mk_p}{c^2k_i}.$$

Moreover, by (A), $1 < c^2/(\lambda mk_p)$ and so

$$k_i < \frac{k_i c^2}{\lambda mk_p} \leq \frac{1}{\lambda |f(\mathbf{G})|}.$$

Case (b). Let $k_p, k_i, k_d > 0$ be such that (B1), (B2) and (B3) hold. In this case, we have $kk_p - ck_i > 0$ and $ck_d - mk_p > 0$. Therefore, $\zeta(\xi) \geq 0$ for all $\xi \in \mathbb{R}_+$ and

$$f(\mathbf{G}) = \lim_{\xi \rightarrow \infty} \zeta(\xi) = 0.$$

Therefore, in each of Cases (a) and (b), hypothesis (16) of Theorem 3.2 holds. As a consequence, we may apply Theorem 2 to conclude that there exists a unique solution $w \in \mathcal{W}_{\text{loc}}^{1,1}(\mathbb{R}_+)$ of (28) with the following properties: $\dot{w}(t) \rightarrow 0$ and $(\Phi(w))(t) \rightarrow rk - d_1$ as $t \rightarrow \infty$. Next, we show that $e(t) := x(t) - r \rightarrow 0$ and $\dot{e}(t) = \dot{x}(t) \rightarrow 0$ as $t \rightarrow \infty$. Indeed, by (27),

$$k_d \ddot{e} + k_p \dot{e} + k_i e = -\dot{w}. \quad (31)$$

Since $k_p, k_i > 0$ and $k_d \geq 0$, the system described by (31) (with $-\dot{w}$ as input) is asymptotically stable. Consequently, since $\dot{w}(t) \rightarrow 0$ as $t \rightarrow \infty$, we may conclude that $e(t) \rightarrow 0$ and $\dot{e}(t) = \dot{x}(t) \rightarrow 0$ as $t \rightarrow \infty$. It now follows from (25) that $\ddot{x}(t) \rightarrow 0$ as $t \rightarrow \infty$. Finally, if $rk - d_1$ is in the interior of $\text{NVS} \Phi$, then boundedness of w , and hence of u , follows from the last part of Theorem 2. \square

Remark 3: (i) Assume that the parameters m, c, k and λ are unknown, but belong to known intervals:

$$\begin{aligned} m &\in (0, m_+], \quad c \in [c_-, c_+], \quad k \in [k_-, \infty), \\ \text{and } \lambda &\in (0, \lambda_+] \end{aligned}$$

where m_+, c_-, c_+, k_- and λ_+ are known positive constants. We give procedures for choosing the PID-controller gains in terms of the constants m_+, c_-, c_+, k_- and λ_+ .

Case (a). Set $k_d = 0$. If the gains k_p, k_i of the PI controller are determined by the following procedure:

(PA) choose k_p, k_i such that

$$0 < k_i < \frac{k_p k_-}{c_+} < \frac{c_-^2 k_-}{\lambda_+ m_+ c_+},$$

then (A) holds and Theorem 4 applies to conclude that the PI controller, with the above gain selection, solves the tracking and disturbance rejection problem.

Case (b). In the case of PID control, if the controller gains are determined by the following procedure:


(PB1) choose $0 < k_i < \infty$,

(PB2) choose $k_p > 0$ such that $k_p > c_+ k_i / k_-$,

(PB3) choose $k_d > 0$ such that $k_d > m_+ k_p / c_-$,

then (B1), (B2) and (B3) hold and Theorem 4 applies to conclude that the PID controller, with the above gain selection, solves the tracking and disturbance rejection problem.

(ii) In general d_1 is unknown (as is d_2), but it is reasonable to assume that $d_1 \in [d_1^-, d_1^+]$, where d_1^- and d_1^+ are known. Moreover, it is reasonable to assume

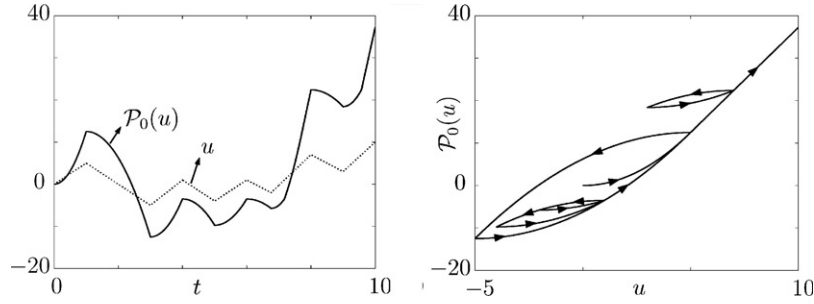Figure 8. Behaviour of the hysteresis operator \mathcal{P}_0 with $l=5$.

that $k \in [k_-, k_+]$, where $0 < k_- < k_+$ are known constants. The conditions

$$\begin{aligned} rk_- - d_1^+, rk_+ - d_1^- &\in \overline{\text{NVS}} \Phi, \quad \text{if } r \geq 0, \\ rk_+ - d_1^+, rk_- - d_1^- &\in \overline{\text{NVS}} \Phi, \quad \text{if } r < 0 \end{aligned}$$

are sufficient conditions in terms of d_1^-, d_1^+, k_- and k_+ guaranteeing that $rk - d_1 \in \overline{\text{NVS}} \Phi$ for all $d_1 \in [d_1^-, d_1^+]$ and all $k \in [k_-, k_+]$.

5. Examples

In this section, we illustrate our main results in the context of Prandtl operators, as discussed in §2. In particular, recalling (11), we consider the hysteresis operator $\mathcal{P}_0: C(\mathbb{R}_+) \rightarrow C(\mathbb{R}_+)$ defined by

$$\begin{aligned} (\mathcal{P}_0(u))(t) &= \int_0^\infty (\mathcal{B}_{h,0}(u))(t) \chi_{[0,l]} dh \\ &= \int_0^l (\mathcal{B}_{h,0}(u))(t) dh, \quad \forall u \in C(\mathbb{R}_+), \forall t \in \mathbb{R}_+, \end{aligned} \quad (32)$$

where $l > 0$ is a positive constant and $\chi_{[0,l]}$ is the indicator function of the interval $[0, l]$. This operator satisfies (N1)–(N6) (with $\lambda = l$ in (N3)), has numerical value set $\text{NVS } \mathcal{P}_0 = \mathbb{R}$, and exhibits nested loops as depicted in Figure 8.

5.1 Systems of form (1)

Consider system (18) with $\Phi = \mathcal{P}_0$ and with $m \in (0, 2]$, $c \in [1, 3]$ and $l = \lambda \in (0, 10]$. Assume a constant disturbance $d = 1$, reference signal $r = 1$ and zero initial condition $u_0 = 0$ on the integrator. Using the procedure in Remark 2, the gains of PID controller are chosen as follows: $k_p = 10$, $k_d = 8$, $k_i = 4$. For nominal plant parameters values $m = 1$, $c = 2$ and $\lambda = 5$, Figure 9

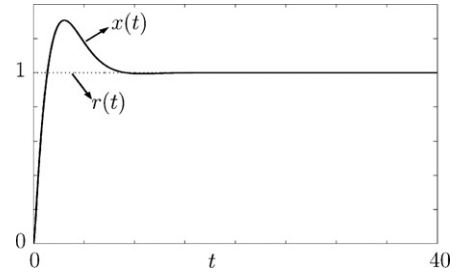
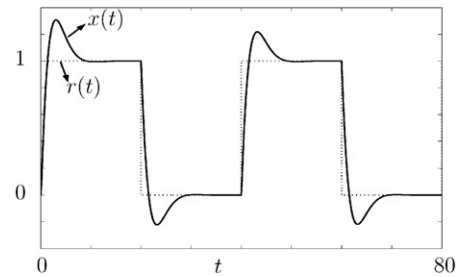


Figure 9. System (1) under PID control.

Figure 10. System (1), with periodic reference signal r , under PID control.

shows the evolution of the closed-loop system with zero initial state.

With appropriate modifications (*viz* re-initialisation of the problem at points of discontinuity of the reference signal), our analysis extends to the problem of tracking piecewise constant signals. Consider, for example, a periodic function r with period 40 and $r(t) \in \{0, 1\}$ for all t . With nominal plant parameter values and controller gain values as above, Figure 10 illustrates system behaviour under PID control.

5.2 Systems of form (2)

Finally, consider system (25) with Φ as above and with $m \in (0, 2]$, $c \in [1, 3]$, $\lambda \in (0, 10]$ and $k \geq 4$. Assume a

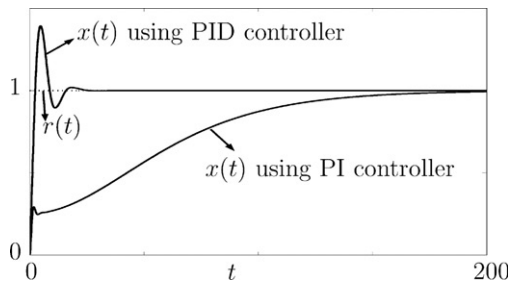
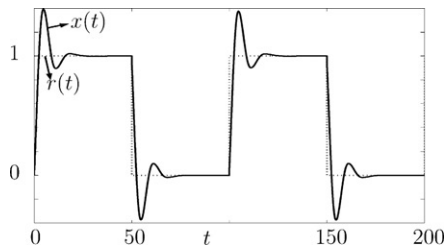


Figure 11. System (2) under PI and PID control.

Figure 12. System (2), with periodic reference signal r , under PID control.

constant disturbance $d_1 = 1$, reference signal $r = 1$, zero disturbance $d_2 = 0$ and $u_0 = 0$.

Case (a). Set $k_d = 0$. Using the procedure in Case (a) of Remark 3, the gains of PI controller are chosen as follows: $k_p = 0.04$, $k_i = 0.05$. For nominal plant parameters values $m = 1$, $c = 2$, $k = 4$ and $\lambda = 5$, Figure 11 shows the evolution of the closed-loop system with zero initial state: as $t \rightarrow \infty$, $x(t)$ converges (albeit slowly) to the constant reference signal r as predicted by Theorem 4.

Case (b). We now include derivative feedback action ($k_d > 0$). In this case, a PID controller is used instead of PI controller. Using the procedure in Case (b) of Remark 3, the gains of PID controller may be chosen as follows: $k_i = 10$, $k_p = 10$ and $k_d = 30$. Again, with nominal plant parameter values $m = 1$, $c = 2$, $k = 4$ and $\lambda = 5$, Figure 11 shows the evolution of the closed-loop system with zero initial state. It can be seen from this figure that, although the displacement $x(t)$ converges asymptotically to the constant reference signal r under either PI or PID control, the PID controller generates the faster response: this is not unexpected given the presence of derivative feedback action in the latter. Finally, we illustrate the case of a periodic reference signal r with period 100 and $r(t) \in \{0, 1\}$ for all t . For the nominal plant parameter values and PID controller gains as above, Figure 12 depicts the system behaviour under PID control.

6. Concluding remarks

The efficacy of PID control for set point regulation and disturbance rejection has been demonstrated in a context of second-order systems with hysteretic components. In each of the two basic structures studied, robust conditions on the PID gains, explicitly formulated in terms of bounds on the system data have been determined under which asymptotic tracking of constant reference signals and rejection of constant disturbance signals is guaranteed. Future work will focus on obtaining similar results for higher-order systems and on exploiting a recently developed input-to-state stability theory for hysteretic systems (see Jayawardhana et al. (2007)) in the design of PID control.

Acknowledgement

This work was supported by the UK Engineering & Physical Sciences Research Council under Grant GR/S94582/01.

References

- Adriaens, J.M.T.A., de Koning, W.L., and Banning, R. (1997), "Design and Modeling of a Piezo-actuated Positioning Mechanism," in *Proceedings of the 36th IEEE Conference on Decision Control*, New York: IEEE, pp. 1978–1983.
- Al-Bender, F., Symens, W., Swevers, J., and Van Brussle, H. (2004), "Theoretical Analysis of the Dynamic Behaviour of Hysteresis Elements in Mechanical Systems," *International Journal of Non-Linear Mechanics*, 39, 1721–1735.
- Brokate, M., and Sprekels, J. (1996), *Hysteresis and Phase Transitions*, New York: Springer Verlag.
- Ge, P., and Jouaneh, M. (1996), "Tracking control of a Piezoceramic actuator," *IEEE Transactions on Control Systems Techniques*, 4, 209–216.
- Gorbet, R.B., and Morris, K.A. (2003), "Closed-loop Position Control of Preisach Hysteresis," *Journal of Intelligent Material Systems and Structures*, 14, 483–495.
- Gorbet, R.B., Morris, K.A., and Wang, D.W.L. (2001), "Passivity-based Stability and Control of Hysteresis in Smart Actuators," *IEEE Transactions on Control Systems Techniques*, 9, 5–16.
- Ikhoulane, F., and Rodellar, J. (2006), "A Linear Controller for Hysteretic Systems," *IEEE Transactions on Atomic Control*, 51, 340–344.
- Ikhoulane, F., Mañosa, V., and Rodellar, J. (2007), "Dynamic Properties of the Hysteretic Bouc-Wen Model," *Systems & Control Letters*, 56, 197–205.
- Iyer, R.V., Tan, X., and Krishnaprasad, P.S. (2005), "Approximate Inversion of the Preisach Hysteresis Operator with Application to Control of Smart Actuators," *IEEE Transactions on Atomic Control*, 50, 798–810.

- Jayawardhana, B., Logemann, H., and Ryan, E.P. (2007), *Input-to-State Stability of Differential Inclusions with Applications to Hysteretic and Quantized Feedback Systems*, submitted for publication.
- Lin, C.J., and Yang, S.R. (2006), "Precise Positioning of Piezo-actuated Stages Using Hysteresis-observer Based Control," *Mechatronics*, 16, 417–426.
- Logemann, H., and Mawby, A.D. (2001), "Low-gain Integral Control of Infinite-dimensional Regular Linear Systems Subject to Input Hysteresis," in *Advances in Mathematical Systems Theory*, eds. F. Colonius, U. Helmke, D. Prätzel-Wolters, & F. Wirth, Boston: Birkhauser, pp. 255–293.
- Logemann, H., and Ryan, E.P. (2003), "Systems with Hysteresis in the Feedback Loop: Existence, Regularity and Asymptotic Behaviour of Solutions," *ESAIM: Control, Optimization and Calculus of Variations*, 9, 169–196.
- Logemann, H., Ryan, E.P., and Shvartsman, I. (2007), "Integral Control of Infinite-dimensional Systems in the Presence of Hysteresis: An Input-Output Approach," *ESAIM: Control, Optimization and Calculus of Variations*, 13, 458–483.
- Mayergoyz, I. (2003), *Mathematical Models of Hysteresis and Their Applications*, Boston: Academic Press.
- Mitchler, P.D., Roshko, R.M., Dan Dahlberg, E., and Wesseling, E. (1997), "Preisach Model for Spin-glass Remanences," *Physical Review B*, 55, 5880–5885.
- Park, Y.W., Lim, M.C., and Kim, D.Y. (2004), "Control of a Magnetostrictive Actuator with Feed-forwarding Inverted Hysteresis," *Journal of Magnetism and Magnetic Materials*, 1, 272–276.
- Song, G., Zhao, J., Zhou, X., and De Abreu-Garcia, J.A. (2005), "Tracking Control of a Piezoceramic Actuator with Hysteresis Compensation using Inverse Preisach Model," *IEEE/ASME Transactions on Mechatronics*, 10, 198–209.
- Symens, W., Al-Bender, F., Swevers, J., and van Brussel, H. (2002), "Dynamic Characterization of Hysteresis Elements in Mechanical Systems," *Proceedings of the 21st IEEE American Control Conference*, New York: IEEE, pp. 4129–4134.
- Tan, X., Baras, J.S., and Krishnaprasad, P.S. (2005), "Control of Hysteresis in Smart Actuators with Application to Micro-positioning," *Systems & Control Letters*, 54, 483–492.
- Wen, Y.K. (1976), "Method of Random Vibration of Hysteretic Systems," *Journal of Engineering Mechanics ASCE*, 102, 249–163..